

155RS Metal Adjustable Spray Nozzle

155RS Metal Adjustable Global Spray Nozzle is made of 304#, 303#, 316# stainless steel or brass(Depending on customers requirement). With the connecting of globe and metal sprayhead, you can precisely adjust the spraying direction to keep it in best state.



The spray head can be disassembled directly without tools. It is widely applied in auto show testin, such as shower testing line of Yantai General Motors bodywork Factory, Shuzhou Hangtian Automobile Factory, Wuhu Qurui Auto-mobile Factory an Beijing. Modern Automobile Factory.

155RS Series

	155RS Series
Material	BRASS、S303(SUS303)material S316(SUS316),other

Screw thread	Nozzle type	Screw on base	Screw on Spray tip	Size(mm)			Weight(gr.)	
				L	h ₁ /h ₂ (Subtense)		BRASS	SUS
male	155RS	1/8	1/8	32	22	21	60	56
	155RS	1/4	1/4	36	22	21	65	60
	155RS	1/4	1/4	39	29	24	110	110
	155RS	3/8	3/8	40	29	24	115	105
	155RS	3/8	3/8	47	35	30	205	190
	155RS	1/2	1/2	54	41	41	350	325
	155RS	3/4	3/4	61	50	46	525	490
Female	155RS	1/8	1/8	28	22	21	69	63
	155RS	1/4	1/8	28	22	21	63	58
	155RS	1/4	1/4	33	29	24	120	110
	155RS	3/8	1/4	33	29	24	110	100
	155RS	3/8	3/8	44	35	30	235	220
	155RS	1/2	1/2	48	41	41	405	375
	155RS	3/4	3/4	55	50	46	600	560

Nozzle specifications	Model
Selective;and you can check our catalogue for details (Common Metal Spray Nozzle)	Brass,SS

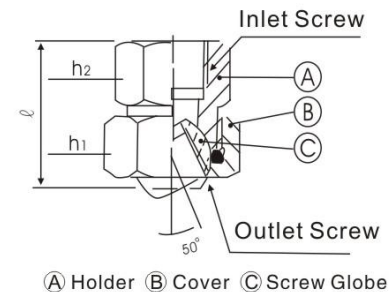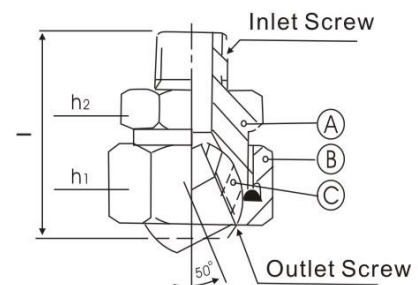

Ordering Information

155RS	3/8(Outside)	CT 6540	3/8	SS	SS
↓	↓	↓	↓	↓	↓
Spray Nozzle	Outer Size	Model	Spray tip Size	Body Material	Spray tip Material